

TROX Malaysia Sdn. Bhd. (278360-V)
 20, Persiaran Bunga Tanjung 1,
 Senawang Land Industrial Park,
 70400, Seremban, Negeri Sembilan Darul Khusus,
 Malaysia
 Telephone : (+6) 06-6788188
 Telefax : (+6) 06-6788 288/388
 E-mail : enquiry@troxmal.com.my
 http://www.troxapo.com

Product Information

Fan Assisted Floor Grille Type CFG PI M 1/8.3/EN/1

Description


The TROX CFG floor grille is the similar like AFG where it has been specifically developed for mounting in Raised Access Floors in such areas as Computer Rooms, where load and damage resistance are of the utmost importance.

Having a rating of extra heavy duty to the latest specifications, the CFG can replace 600mm square floor tiles to handle supply air. Grille border can be specified to suit the type of floor system used. A range of surface finishes is available.

Unlike AFG, CFG is having two options of fan to greatly assist supply air to room.

CFG-AC is giving a constant airflow while CFG-EC airflow is proportional by 0-10Vdc signal.

Constructions

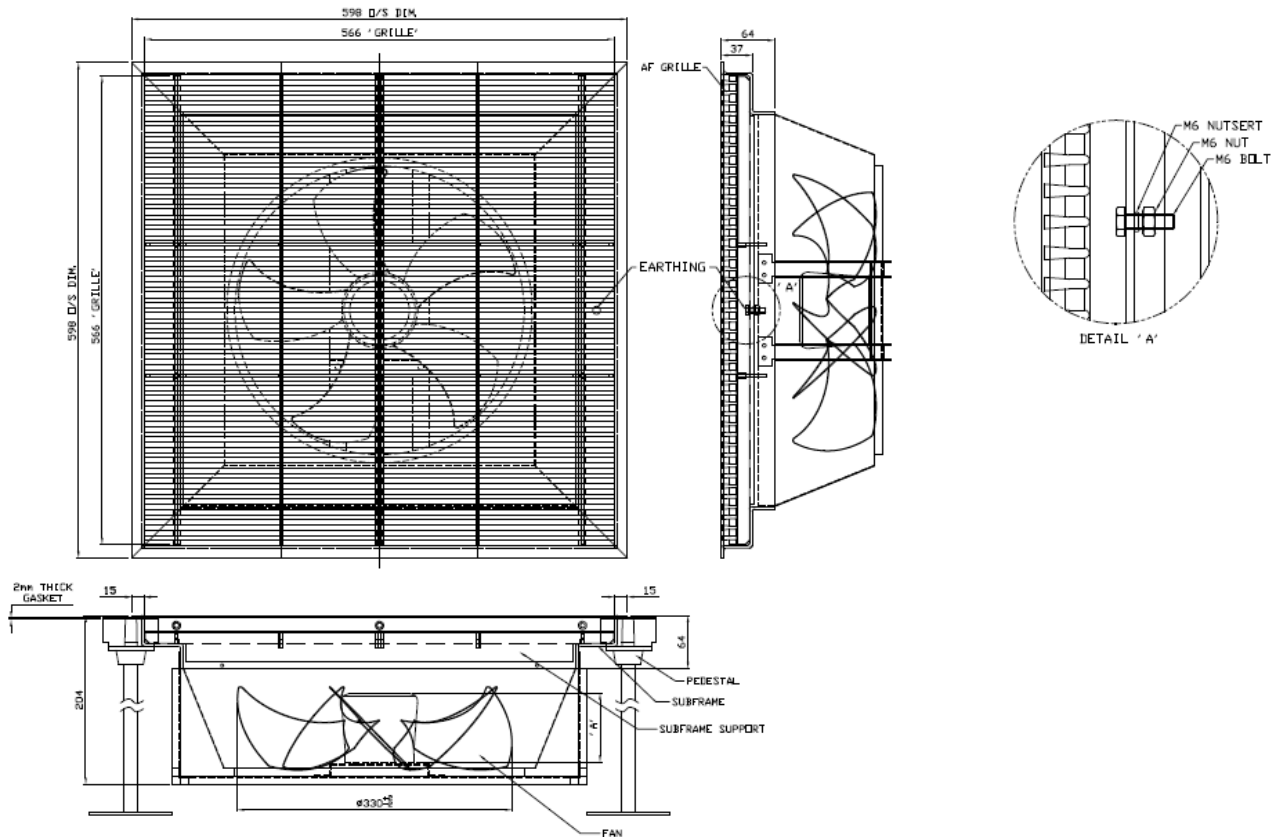

Materials

Grille face and border frame are extruded from aluminium sections, mill finish as standard. Optional finishes include natural anodise, black with finished face, powder coated silver grey RAL 9006 or nylon coated black. Rear assemblies made from formed sheet steel frame and extruded aluminium blades, stove enamelled black (RAL 9005).

TROX Malaysia Sdn. Bhd. (278360-V)
 20, Persiaran Bunga Tanjung 1,
 Senawang Land Industrial Park,
 70400, Seremban, Negeri Sembilan Darul Khusus,
 Malaysia
 Telephone : (+6) 06-6788188
 Telefax : (+6) 06-6788 288/388
 E-mail : enquiry@troxmal.com.my
 http://www.troxapo.com

Product Information

Fan Assisted Floor Grille
Type CFG
PI M 1/8.3/EN/1

Performance Data

Type	CFG-AC	CFG-EC
Mean Area, m ²	0.09284	0.102
Airflow, l/s	335	0 – 580
Current consumption, A	0.4	0 – 0.6 (depends on input signal)
Input signal	NIL	0-10Vdc
Noise at max airflow	NC 53	NC 60
Airflow at NC35	NIL	205 l/s

Order Code

